

ShellyX module X0 datasheet


Datasheet version 0.2

Hardware revision V013_M



Table of contents


Features	4
Module overview	5
IO layout	5
Module dimensions	6
Electrical Characteristics	7
Absolute Maximum Ratings	7
Recommended Operating Conditions	7
DC Characteristics (3.3 V, 25 °C)	8
Current Consumption Characteristics	9
Current Consumption in Active Mode	9
Wi-Fi (2.4 GHz) in Active Mode	9
Bluetooth LE in Active Mode	9
Current Consumption in Other Modes	10
Modem sleep mode	10
Low power modes	10
RF Characteristics	11
Wi-Fi Radio	11
Wi-Fi RF Transmitter (TX) Characteristics	12
TX Power with Spectral Mask and EVM Meeting 802.11 Standards	12
TX EVM Test	12
Wi-Fi RF Receiver (RX) Characteristics	13
RX Sensitivity	13
Maximum RX level	14
RX Adjacent channel rejection	14
Bluetooth 5 (LE) Radio	15
Bluetooth LE RF Transmitter (TX) Characteristics	15
Bluetooth LE RF Characteristics	15
Bluetooth LE - Transmitter Characteristics - 1 Mbps	15
Bluetooth LE - Transmitter Characteristics - 2 Mbps	15



Bluetooth LE - Transmitter Characteristics - 125 Kbps	16
Bluetooth LE - Transmitter Characteristics - 500 Kbps	16
Bluetooth LE RF Receiver (RX) Characteristics.....	17
Bluetooth LE - Receiver Characteristics - 1 Mbps	17
Bluetooth LE - Receiver Characteristics - 2 Mbps	17
Bluetooth LE - Receiver Characteristics - 125 Kbps	18
Bluetooth LE - Receiver Characteristics - 500 Kbps	19

List of Tables

Table 1: Absolute Maximum Ratings	7
Table 2: Recommended Operating Conditions	7
Table 3: DC Characteristics (3.3 V, 25 °C)	8
Table 4: Current Consumption for Wi-Fi (2.4 GHz) in Active Mode.....	9
Table 5: Current Consumption for Bluetooth LE in Active Mode	9
Table 6: Current Consumption in Modem-sleep Mode	10
Table 7: Current Consumption in Low-Power Modes.....	10
Table 8: Wi-Fi RF Characteristics.....	11
Table 9: TX Power with Spectral Mask and EVM Meeting 802.11 Standards.....	12
Table 10: TX EVM Test ¹	12
Table 11: RX Sensitivity	14
Table 12: Maximum RX Level	14
Table 13: RX Adjacent Channel Rejection	14
Table 14: Bluetooth LE RF Characteristics	15
Table 15: Bluetooth LE - Transmitter Characteristics - 1 Mbps	15
Table 16: Bluetooth LE - Transmitter Characteristics - 2 Mbps	16
Table 17: Bluetooth LE - Transmitter Characteristics - 125 Kbps	16
Table 18: Bluetooth LE - Transmitter Characteristics - 500 Kbps.....	16
Table 19: Bluetooth LE - Receiver Characteristics - 1 Mbps	17
Table 20: Bluetooth LE - Receiver Characteristics - 2 Mbps	18
Table 21: Bluetooth LE - Receiver Characteristics - 125 Kbps	18
Table 22: Bluetooth LE - Receiver Characteristics - 500 Kbps	19



Features

CPU and On-Chip Memory

- ESP32-C3 embedded, 32-bit RISC-V single-core processor, up to 160 MHz
- 384 KB ROM
- 400 KB SRAM (16 KB for cache)
- 8 KB SRAM in RTC
- 8 MB flash in chip package

*The flash is integrated into the chip's package.
Flash supports more than **100,000**
program/erase cycles and more than **20 years**
data retention time.*

Wi-Fi

- IEEE 802.11 b/g/n-compliant
- Center frequency range of operating channel:
2412 ~ 2484 MHz
- Supports 20 MHz, 40 MHz bandwidth
in 2.4 GHz band
- 1T1R mode with data rate up to 150 Mbps
- Simultaneous support for Infrastructure BSS in
Station mode, SoftAP mode, Station + SoftAP
mode, and promiscuous mode

*Note that when the chip scans in Station mode,
the SoftAP channel will change along with the
Station channel*

Bluetooth®

- Bluetooth LE
- Internal co-existence mechanism between Wi-Fi
and Bluetooth to share the same antenna
- Speed: 125 Kbps, 500 Kbps, 1 Mbps, 2 Mbps
- Advertising extensions
- Multiple advertisement sets
- Channel selection algorithm #2

Peripherals

- Up to 4 **digital inputs or outputs**, usable by the
firmware platform
- Support for UART communication via JS
interface, more protocols will be supported in
the future
- Temperature & humidity sensor support -
DS18B20 & DHT22

Integrated Components on Module

- 40 MHz crystal oscillator

Antenna

- On-board PCB antenna

Operating conditions


- Power Supply: **3.3–3.6 V DC** (5 V DC input
supported via **internal regulation**)
- Operating ambient temperature: –40°C ~ 105 °C

*Ambient temperature specifies the
recommended temperature range of the
environment immediately outside the Shelly
module.*



Module overview

IO layout

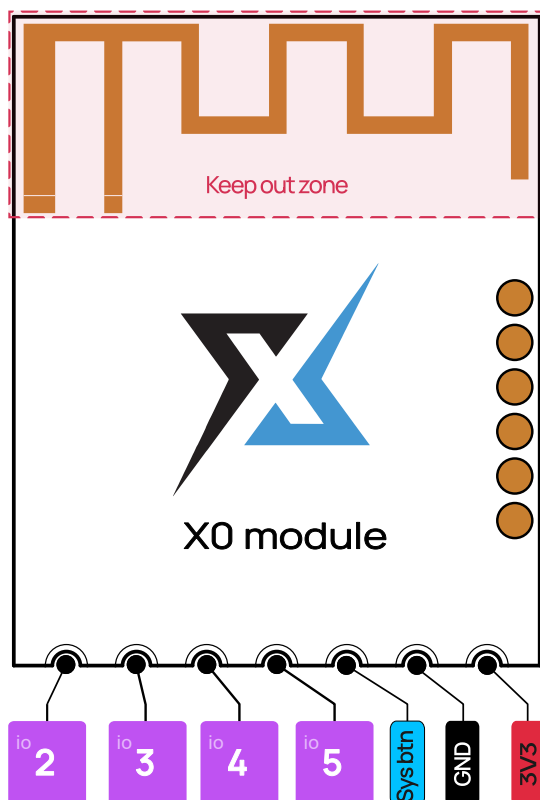


Keep out zone

The exact dimensions are marked in the Module dimensions schematic.




Module dimensions


Unit: mm

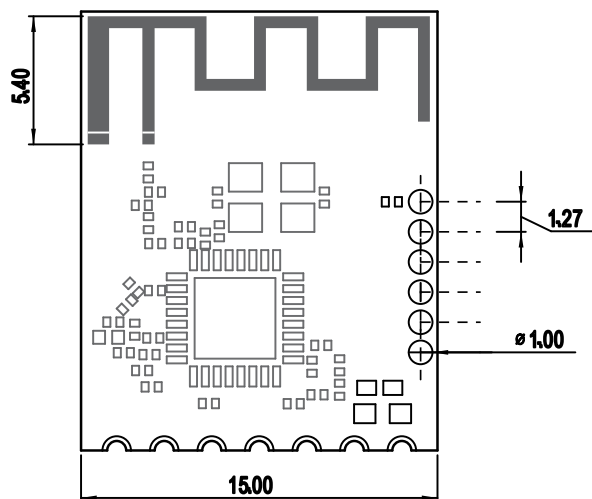

Top view

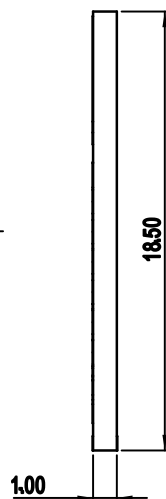

Side view

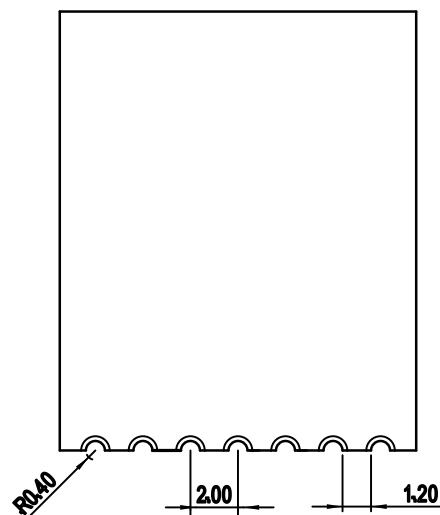

Bottom view



Electrical Characteristics

Absolute Maximum Ratings

Stresses above those listed in **Table 1 Absolute Maximum Ratings** may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under **Table 2 Recommended Operating Conditions** is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.


Symbol	Parameter	Min	Max	Unit
VDD33	Power supply voltage	-0.3	3.6	V
TSTORE	Storage temperature	-40	105	°C

Table 1: Absolute Maximum Ratings

Recommended Operating Conditions

Symbol	Parameter	Min	Typ.	Max	Unit
VDD33	Power supply voltage	3.0	3.3	3.6	V
I _{VDD}	Current delivered by external power supply min	0.5	—	—	A
T _A	Operating ambient temperature	-40	—	105	°C

Table 2: Recommended Operating Conditions




DC Characteristics (3.3 V, 25 °C)

Symbol	Parameter	Min	Typ.	Max	Unit
C_{IN}	Pin capacitance	—	2	—	pF
V_{IH}	High-level input voltage	$0.75 \times VDD^1$	—	$VDD^1 + 0.3$	V
V_{IL}	Low-level input voltage	-0.3	—	$0.25 \times VDD^1$	V
I_{IH}	High-level input current	—	—	50	nA
I_{IL}	Low-level input current	—	—	50	nA
V_{OH}^2	High-level output voltage	$0.8 \times VDD^1$	—	—	V
V_{OL}^2	Low-level output voltage	—	—	$0.1 \times VDD^1$	V
I_{OH}	High-level source current ($VDD^1 = 3.3$ V, $V_{OH} > 2.64$ V, PAD_DRIVER = 3)	—	40	—	mA
I_{OL}	Low-level sink current ($VDD^1 = 3.3$ V, $V_{OL} = 0.495$ V, PAD_DRIVER = 3)	—	28	—	mA
R_{PU}	Pull-up resistor	—	45	—	k Ω
R_{PD}	Pull-down resistor	—	45	—	k Ω
V_{IH_nRST}	Chip reset release voltage	$0.75 \times VDD^1$	—	$VDD^1 + 0.3$	V
V_{IL_nRST}	Chip reset voltage	-0.3	—	$0.25 \times VDD^1$	V

Table 3: DC Characteristics (3.3 V, 25 °C)

¹ VDD is the I/O voltage for pins of a particular power domain.

² VOH and VOL are measured using high-impedance load.



Current Consumption Characteristics

Current Consumption in Active Mode

The current consumption measurements are taken with a **3.3 V** supply at **25 °C** ambient temperature.

TX current consumption is rated at a 100% duty cycle.

RX current consumption is rated when the peripherals are disabled and the CPU idle.

Wi-Fi (2.4 GHz) in Active Mode


Work mode	Description		Peak (mA)
Active (RF working)	TX	802.11b, 1 Mbps, @20.5 dBm	350
		802.11g, 54 Mbps, @18 dBm	295
		802.11n, HT20, MCS7, @17.5 dBm	290
		802.11n, HT40, MCS7, @17 dBm	290
	RX	802.11b/g/n, HT20	82
		802.11n, HT40	84

Table 4: Current Consumption for Wi-Fi (2.4 GHz) in Active Mode

Bluetooth LE in Active Mode

Work Mode	RF Condition	Description	Peak (mA)
Active (RF working)	TX	Bluetooth LE @ 20.0 dBm	340
		Bluetooth LE @ 9.0 dBm	190
		Bluetooth LE 0 dBm	170
		Bluetooth LE @ -15.0 dBm	100
	RX	Bluetooth LE	86

Table 5: Current Consumption for Bluetooth LE in Active Mode



Current Consumption in Other Modes

Modem sleep mode

Mode	CPU Frequency (MHz)	Description	Typ	
			All Peripherals Clocks Disabled (mA)	All Peripherals Clocks Enabled (mA) ¹
Modem-sleep ^{2,3}	160	CPU is idle	16	21
		CPU is running	23	28
	80	CPU is idle	13	18
		CPU is running	17	22

Table 6: Current Consumption in Modem-sleep Mode

¹ In practice, the current consumption might be different depending on which peripherals are enabled.


² In Modem-sleep mode, Wi-Fi is clock gated.

³ In Modem-sleep mode, the consumption might be higher when accessing flash. For a flash rated at 80 Mbit/s, in SPI 2-line mode the consumption is 10 mA.

Low power modes

Mode	Description	Typ (μA)
Light-sleep	VDD_SPI and Wi-Fi are powered down, and all GPIOs are high-impedance	130
Deep-sleep	RTC timer + RTC memory	5
Power off	CHIP_EN is set to low level, the chip is powered off	1

Table 7: Current Consumption in Low-Power Modes



RF Characteristics

The RF data is measured at the antenna port, where RF cable is connected, including the front-end loss. The external antennas used for the tests on the modules with external antenna connectors have an impedance of 50 Ω .

Devices should operate in the center frequency range allocated by regional regulatory authorities.

Unless otherwise stated, the RF tests are conducted with a 3.3 V ($\pm 5\%$) supply at 25 °C ambient temperature.

Wi-Fi Radio

Name	Description
Center frequency range of operating channel	2412 ~ 2484 MHz
Wi-Fi wireless standard	IEEE 802.11b/g/n

Table 8: Wi-Fi RF Characteristics



Wi-Fi RF Transmitter (TX) Characteristics

TX Power with Spectral Mask and EVM Meeting 802.11 Standards

Rate	Min (dBm)	Typ (dBm)	Max (dBm)
802.11b, 1 Mbps	—	20.5	—
802.11b, 11 Mbps	—	20.5	—
802.11g, 6 Mbps	—	20.0	—
802.11g, 54 Mbps	—	18.0	—
802.11n, HT20, MCS0	—	19.0	—
802.11n, HT20, MCS7	—	17.5	—
802.11n, HT40, MCS0	—	18.5	—
802.11n, HT40, MCS7	—	17.0	—


Table 9: TX Power with Spectral Mask and EVM Meeting 802.11 Standards

TX EVM Test

Rate	Min (dB)	Typ (dB)	Limit (dB)
802.11b, 1 Mbps, 20.5 dBm	—	-24.5	-10
802.11b, 11 Mbps, @20.5 dBm	—	-25.0	-10
802.11g, 6 Mbps, @20 dBm	—	-23.0	-5
802.11g, 54 Mbps, 18 dBm	—	-28.0	-25
802.11n, HT20, MCS0, @19 dBm	—	-23.5	-5
802.11n, HT20, MCS7, @17.5 dBm	—	-30.5	-27
802.11n, HT40, MCS0, 18.5 dBm	—	-26.5	-5
802.11n, HT40, MCS7, @17 dBm	—	-30.5	-27

Table 10: TX EVM Test¹

¹ EVM is measured at the corresponding typical TX power provided in **Table 9 TX Power with Spectral Mask and EVM Meeting 802.11 Standards** above.



Wi-Fi RF Receiver (RX) Characteristics

For RX tests, the PER (packet error rate) limit is 8% for 802.11b, and 10% for 802.11g/n.

RX Sensitivity

Rate	Min (dBm)	Typ (dBm)	Max (dBm)
802.11b, 1 Mbps	—	-98.0	—
802.11b, 2 Mbps	—	-96.0	—
802.11b, 5.5 Mbps	—	-93.0	—
802.11b, 11 Mbps	—	-88.6	—
802.11g, 6 Mbps	—	-92.8	—
802.11g, 9 Mbps	—	-91.8	—
802.11g, 12 Mbps	—	-90.8	—
802.11g, 18 Mbps	—	-88.4	—
802.11g, 24 Mbps	—	-85.4	—
802.11g, 36 Mbps	—	-82.0	—
802.11g, 48 Mbps	—	-77.8	—
802.11g, 54 Mbps	—	-76.2	—
802.11n, HT20, MCS0	—	-92.6	—
802.11n, HT20, MCS1	—	-90.6	—
802.11n, HT20, MCS2	—	-88.0	—
802.11n, HT20, MCS3	—	-84.8	—
802.11n, HT20, MCS4	—	-81.6	—
802.11n, HT20, MCS5	—	-77.4	—
802.11n, HT20, MCS6	—	-75.6	—
802.11n, HT20, MCS7	—	-74.4	—
802.11n, HT40, MCS0	—	-90.0	—
802.11n, HT40, MCS1	—	-87.6	—
802.11n, HT40, MCS2	—	-84.8	—
802.11n, HT40, MCS3	—	-81.8	—
802.11n, HT40, MCS4	—	-78.4	—
802.11n, HT40, MCS5	—	-74.2	—
802.11n, HT40, MCS6	—	-72.6	—
802.11n, HT40, MCS7	—	-71.2	—




Table 11: RX Sensitivity

Maximum RX level


Rate	Min (dBm)	Typ (dBm)	Max (dBm)
802.11b, 1 Mbps	—	5	—
802.11b, 11 Mbps	—	5	—
802.11g, 6 Mbps	—	5	—
802.11g, 54 Mbps	—	0	—
802.11n, HT20, MCS0	—	5	—
802.11n, HT20, MCS7	—	0	—
802.11n, HT40, MCS0	—	5	—
802.11n, HT40, MCS7	—	0	—

Table 12: Maximum RX Level

RX Adjacent channel rejection

Rate	Min (dB)	Typ (dB)	Max (dB)
802.11b, 1 Mbps	—	35	—
802.11b, 11 Mbps	—	35	—
802.11g, 6 Mbps	—	31	—
802.11g, 54 Mbps	—	14	—
802.11n, HT20, MCS0	—	31	—
802.11n, HT20, MCS7	—	13	—
802.11n, HT40, MCS0	—	19	—
802.11n, HT40, MCS7	—	8	—

Table 13: RX Adjacent Channel Rejection



Bluetooth 5 (LE) Radio

Bluetooth LE RF Transmitter (TX) Characteristics

Bluetooth LE RF Characteristics

Name	Description
Center frequency range of operating channel	2402 ~ 2480 MHz
RF transmit power range	-24.0 ~ 20.0 dBm

Table 14: Bluetooth LE RF Characteristics


Bluetooth LE - Transmitter Characteristics - 1 Mbps

Parameter	Description	Min	Typ	Max	Unit
In-band emissions	$F = F_0 \pm 2 \text{ MHz}$	—	-37.62	—	dBm
	$F = F_0 \pm 3 \text{ MHz}$	—	-41.95	—	dBm
	$F = F_0 \pm > 3 \text{ MHz}$	—	-44.48	—	dBm
Modulation characteristics	$\Delta f_{1\text{avg}}$	—	245.00	—	kHz
	$\Delta f_{2\text{max}}$	—	208.00	—	kHz
	$\Delta f_{2\text{avg}} / \Delta f_{1\text{avg}}$	—	0.93	—	—
Carrier frequency offset	—	—	-9.00	—	kHz
Carrier frequency drift	$ f_0 - f_n _{n=2,3,4,\dots,k}$	—	1.17	—	kHz
	$ f_1 - f_0 $	—	0.30	—	kHz
	$ f_n - f_{n-5} _{n=6,7,8,\dots,k}$	—	4.90	—	kHz

Table 15: Bluetooth LE - Transmitter Characteristics - 1 Mbps

Bluetooth LE - Transmitter Characteristics - 2 Mbps

Parameter	Description	Min	Typ	Max	Unit
In-band emissions	$F = F_0 \pm 4 \text{ MHz}$	—	-43.55	—	dBm
	$F = F_0 \pm 5 \text{ MHz}$	—	-45.26	—	dBm
	$F = F_0 \pm > 5 \text{ MHz}$	—	-47.00	—	dBm
Modulation characteristics	$\Delta f_{1\text{avg}}$	—	497.00	—	kHz
	$\Delta f_{2\text{max}}$	—	398.00	—	kHz
	$\Delta f_{2\text{avg}} / \Delta f_{1\text{avg}}$	—	0.95	—	—
Carrier frequency offset	—	—	-9.00	—	kHz



Carrier frequency drift	$ f_0 - f_n _{n=2,3,4,...k}$	—	0.46	—	kHz
	$ f_1 - f_0 $	—	0.70	—	kHz
	$ f_n - f_{n-5} _{n=6,7,8,...k}$	—	6.80	—	kHz

Table 16: Bluetooth LE - Transmitter Characteristics - 2 Mbps

Bluetooth LE - Transmitter Characteristics - 125 Kbps


Parameter	Description	Min	Typ	Max	Unit
In-band emissions	$F = F_0 \pm 2 \text{ MHz}$	—	-37.90	—	dBm
	$F = F_0 \pm 3 \text{ MHz}$	—	-41.00	—	dBm
	$F = F_0 \pm > 3 \text{ MHz}$	—	-42.50	—	dBm
Modulation characteristics	$\Delta f_{1\text{avg}}$	—	252.00	—	kHz
	$\Delta f_{1\text{max}}$	—	200.00	—	kHz
Carrier frequency offset	—	—	-13.70	—	kHz
Carrier frequency drift	$ f_0 - f_n _{n=1,2,3,...k}$	—	1.52	—	kHz
	$ f_0 - f_3 $	—	0.65	—	kHz
	$ f_n - f_{n-3} _{n=7,8,9,...k}$	—	0.70	—	kHz

Table 17: Bluetooth LE - Transmitter Characteristics - 125 Kbps

Bluetooth LE - Transmitter Characteristics - 500 Kbps

Parameter	Description	Min	Typ	Max	Unit
In-band emissions	$F = F_0 \pm 2 \text{ MHz}$	—	-37.90	—	dBm
	$F = F_0 \pm 3 \text{ MHz}$	—	-41.30	—	dBm
	$F = F_0 \pm > 3 \text{ MHz}$	—	-42.80	—	dBm
Modulation characteristics	$\Delta f_{2\text{avg}}$	—	220.00	—	kHz
	$\Delta f_{2\text{max}}$	—	205.00	—	kHz
Carrier frequency offset	—	—	-11.90	—	kHz
Carrier frequency drift	$ f_0 - f_n _{n=1,2,3,...k}$	—	1.37	—	kHz
	$ f_0 - f_3 $	—	1.09	—	kHz
	$ f_n - f_{n-3} _{n=7,8,9,...k}$	—	0.51	—	kHz

Table 18: Bluetooth LE - Transmitter Characteristics - 500 Kbps



Bluetooth LE RF Receiver (RX) Characteristics

Bluetooth LE - Receiver Characteristics - 1 Mbps


Parameter	Description	Min	Typ	Max	Unit
Sensitivity @30.8% PER	—	—	-96	—	dBm
Maximum received signal @30.8% PER	—	—	10	—	dBm
Co-channel C/I	—	—	8	—	dB
Adjacent channel selectivity C/I	$F = F_0 + 1 \text{ MHz}$	—	-4	—	dB
	$F = F_0 - 1 \text{ MHz}$	—	-3	—	dB
	$F = F_0 + 2 \text{ MHz}$	—	-32	—	dB
	$F = F_0 - 2 \text{ MHz}$	—	-36	—	dB
	$F \geq F_0 + 3 \text{ MHz}^{(1)}$	—	—	—	dB
	$F \leq F_0 - 3 \text{ MHz}$	—	-39	—	dB
Image frequency	—	—	-29	—	dB
Adjacent channel to image frequency	$F = F_{\text{image}} + 1 \text{ MHz}$	—	-38	—	dB
	$F = F_{\text{image}} - 1 \text{ MHz}$	—	-34	—	dB
Out-of-band blocking performance	30 MHz ~ 2000 MHz	—	-9	—	dBm
	2003 MHz ~ 2399 MHz	—	-18	—	dBm
	2484 MHz ~ 2997 MHz	—	-16	—	dBm
	3000 MHz ~ 12.75 GHz	—	-6	—	dBm
Intermodulation	—	—	-44	—	dBm

Table 19: Bluetooth LE - Receiver Characteristics - 1 Mbps

¹ Refer to the value of Adjacent channel to image frequency when $F = F_{\text{image}} - 1 \text{ MHz}$.

Bluetooth LE - Receiver Characteristics - 2 Mbps

Parameter	Description	Min	Typ	Max	Unit
Sensitivity @30.8% PER	—	—	-93	—	dBm
Maximum received signal @30.8% PER	—	—	0	—	dBm
Co-channel C/I	—	—	10	—	dB
Adjacent channel selectivity C/I	$F = F_0 + 2 \text{ MHz}$	—	-7	—	dB
	$F = F_0 - 2 \text{ MHz}$	—	-7	—	dB
	$F = F_0 + 4 \text{ MHz}^{(1)}$	—	—	—	dB
	$F = F_0 - 4 \text{ MHz}$	—	-34	—	dB
	$F \geq F_0 + 6 \text{ MHz}$	—	-39	—	dB



	$F \leq F_0 - 6 \text{ MHz}$	—	-39	—	dB
Image frequency	—	—	-27	—	dB
Adjacent channel to image frequency	$F = F_{\text{image}} + 2 \text{ MHz}$	—	-39	—	dB
	$F = F_{\text{image}} - 2 \text{ MHz}^{(2)}$	—	—	—	dB
Out-of-band blocking performance	30 MHz ~ 2000 MHz	—	-17	—	dBm
	2003 MHz ~ 2399 MHz	—	-19	—	dBm
	2484 MHz ~ 2997 MHz	—	-16	—	dBm
	3000 MHz ~ 12.75 GHz	—	-22	—	dBm
Intermodulation	—	—	-40	—	dBm

Table 20: Bluetooth LE - Receiver Characteristics - 2 Mbps

¹ Refer to the value of Image frequency.


² Refer to the value of Adjacent channel selectivity C/I when $F = F_0 + 2 \text{ MHz}$.

Bluetooth LE - Receiver Characteristics - 125 Kbps

Parameter	Description	Min	Typ	Max	Unit
Sensitivity @30.8% PER	—	—	-104	—	dBm
Maximum received signal @30.8% PER	—	—	10	—	dBm
Co-channel C/I	—	—	2	—	dB
Adjacent channel selectivity C/I	$F = F_0 + 1 \text{ MHz}$	—	-6	—	dB
	$F = F_0 - 1 \text{ MHz}$	—	-5	—	dB
	$F = F_0 + 2 \text{ MHz}$	—	-40	—	dB
	$F = F_0 - 2 \text{ MHz}$	—	-42	—	dB
	$F \geq F_0 + 3 \text{ MHz}^{(1)}$	—	—	—	dB
	$F \leq F_0 - 3 \text{ MHz}$	—	-46	—	dB
Image frequency	—	—	-34	—	dB
Adjacent channel to image frequency	$F = F_{\text{image}} + 1 \text{ MHz}$	—	-44	—	dB
	$F = F_{\text{image}} - 1 \text{ MHz}$	—	-37	—	dB

Table 21: Bluetooth LE - Receiver Characteristics - 125 Kbps

¹ Refer to the value of Adjacent channel to image frequency when $F = F_{\text{image}} - 1 \text{ MHz}$.



Bluetooth LE - Receiver Characteristics - 500 Kbps

Parameter	Description	Min	Typ	Max	Unit
Sensitivity @30.8% PER	—	—	-99	—	dBm
Maximum received signal @30.8% PER	—	—	10	—	dBm
Co-channel C/I	—	—	3	—	dB
Adjacent channel selectivity C/I	$F = F_0 + 1 \text{ MHz}$	—	-5	—	dB
	$F = F_0 - 1 \text{ MHz}$	—	-7	—	dB
	$F = F_0 + 2 \text{ MHz}$	—	-39	—	dB
	$F = F_0 - 2 \text{ MHz}$	—	-40	—	dB
	$F \geq F_0 + 3 \text{ MHz}^{(1)}$	—	—	—	dB
	$F \leq F_0 - 3 \text{ MHz}$	—	-40	—	dB
Image frequency	—	—	-34	—	dB
Adjacent channel to image frequency	$F = F_{\text{image}} + 1 \text{ MHz}$	—	-43	—	dB
	$F = F_{\text{image}} - 1 \text{ MHz}$	—	-38	—	dB

Table 22: Bluetooth LE - Receiver Characteristics - 500 Kbps

¹ Refer to the value of Adjacent channel to image frequency when $F = F_{\text{image}} - 1 \text{ MHz}$.